

RNAV (GPS) RWY 14


ONTARIO MUNI (ONO)

WAAS CH 78207 W14A	APP CRS 142°	Rwy Idg TDZE Apt Elev	5011 2193 2193
---------------------------------	------------------------	-----------------------------	---

▼ Baro-VNAV NA when using Caldwell altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 45°C (113°F). DME/DME RNP -0.3 NA.
 ▲ Visibility reduction by helicopters NA. When local altimeter setting not received, use Caldwell altimeter setting and increase DA/MDA 100 feet, and increase LPV visibility ¼ mile all Cats, LNAV/VNAV visibility ½ mile all Cats, LNAV Cat C and D ¼ mile, Circling Cat C ¼ mile.

MISSED APPROACH: Climb to 9000 direct TUCUB and right turn via 241° track to LUYID and right turn via 342° track to HOVEL and hold.


ASOS 135.275	SALT LAKE CENTER 128.05 387.15	UNICOM 122.8 (CTAF)
------------------------	--	-------------------------------

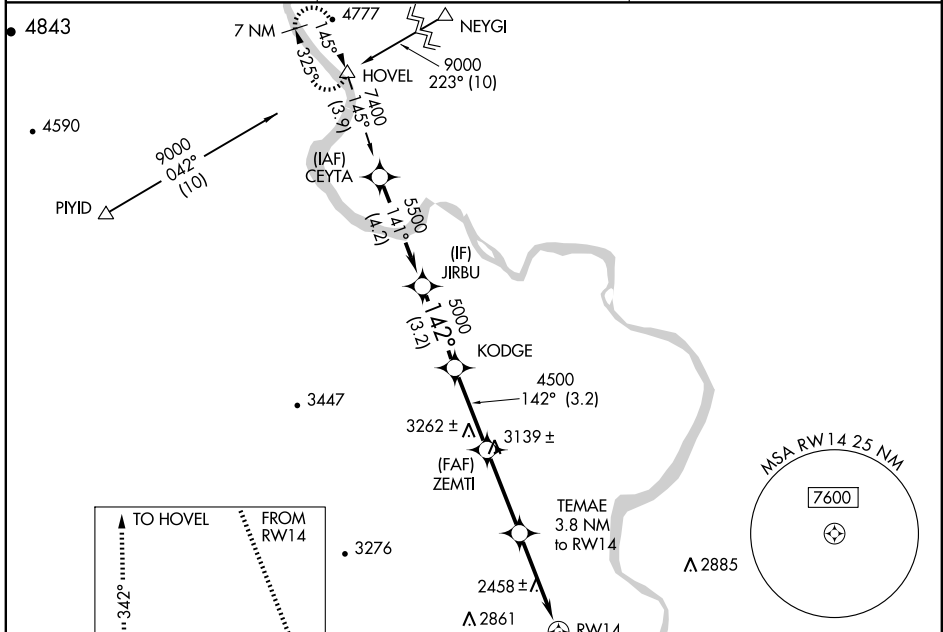

NW-1, 08 APR 2010 to 06 MAY 2010

NW-1, 08 APR 2010 to 06 MAY 2010

Procedure Turn NA	JIRBU	9000	TUCUB	LUYID	HOVEL
GS 3.00° TCH 40	5500	5000	4500	3420*	
	3.2 NM	3.2 NM	3.2 NM	3.8 NM	

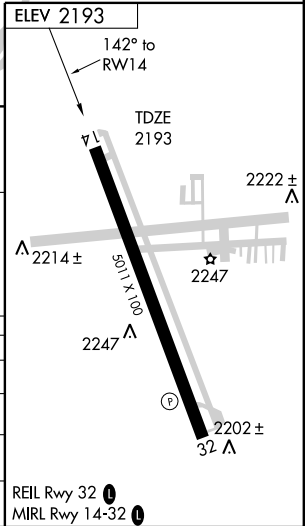

CATEGORY	A	B	C	D
LPV DA		2744-2	551 (600-2)	
LNAV/ VNAV DA		2781-2	588 (600-2)	
LNAV MDA	2720-1	527 (600-1)	2720-1½ 527 (600-1½)	2720-1¾ 527 (600-1¾)
CIRCLING	2720-1 527 (600-1)	2760-1 567 (600-1)	2760-1½ 567 (600-1½)	2760-2 567 (600-2)